

Features


- Cavity Band Pass Filter with Low Pass Filter.
- Typical 0.3 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	962 ~ 1,213 MHz	BW : 251 MHz
Center Frequency	1,087.5 MHz	
Insertion Loss (Max.)	0.3 dB	
Return Loss (Min.)	20.0 dB	
Rejection (Min.)	60.0 dB @ 1.6 ~ 9.0 GHz	
In/ Out Impedance	50 Ω	
Max Power	8kW (Worst RF Pulse : 12us, Width : 0.5 us)	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	260*65* 49 mm	Excluding Connectors
Connector	N-type (Female)	

Outline drawing

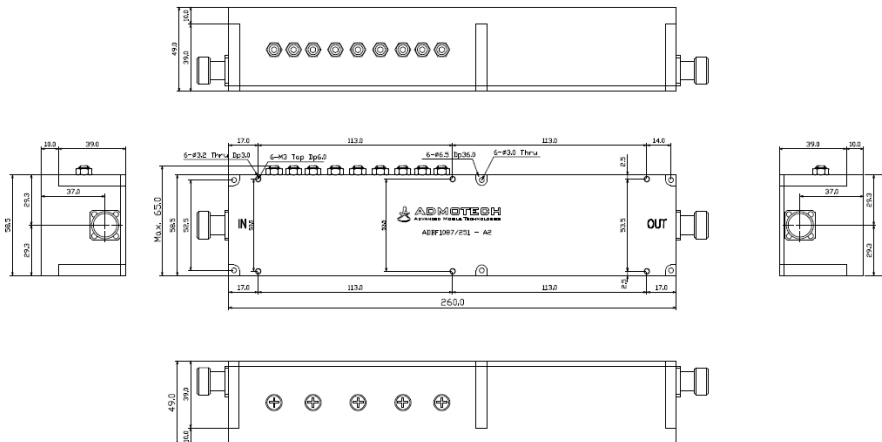

Typical Response

